



Painel Retangular Embutir



18W

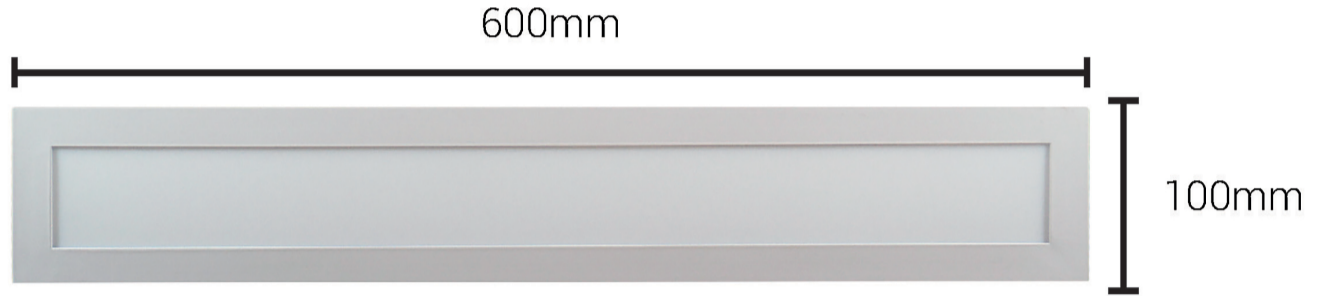

36W

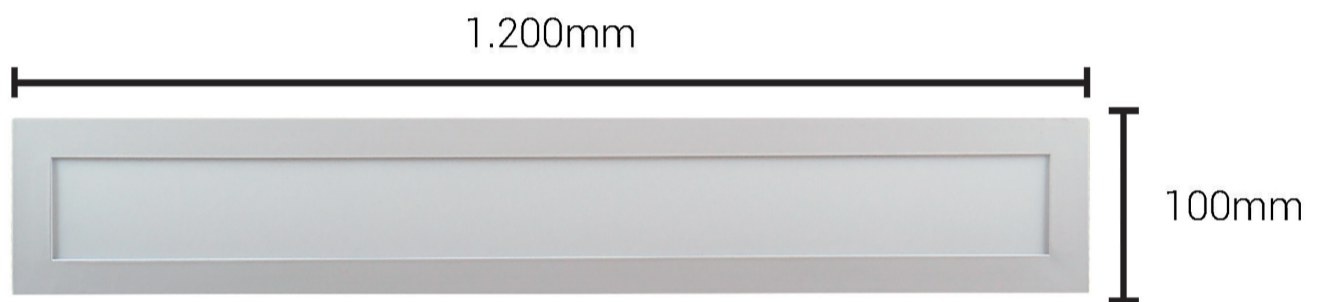

10mm **H**

VIDA ÚTIL
25.000h

IP
20

IRC
>70

AUTOVOLT
100-240V

ÂNGULO DE ABERTURA
120°

POTÊNCIA	FP	FLUXO LUMINOSO	EFICIÊNCIA LUMINOSA	TEMPERATURA DE COR	DIMENSÕES	CAIXA	REF.	CÓD. DE BARRAS
18W	≥0,5	1.350lm	75lm/W	☀ 3.000K	600x100x10mm	10 Unid.	13330	7898461973703
				⚙ 4.000K			13331	7898461973710
				⚙ 6.500K			13328	7898461973680
36W	≥0,5	2.700lm	75lm/W	☀ 3.000K	1.200x100x10mm	10 Unid.	13329	7898461973697
				⚙ 4.000K			13326	7898461973666
				⚙ 6.500K			13327	7898461973673